

# STELLAx4



## 4x 8Bit Soundchips/TIA's on a 10x10cm PCB,

controlled from a STM32F4 Microcontroller [dipcoref4](#), based on [Antichambre's TIA Module](#), with [AD9833's](#) as External programmable Clock, the Frequency-range is expanded...


**The Board acts a Motherboard**, for

- 4x Soundchip... AND:

also like the [stm32f4\\_module](#) it provides:

- Midi-IO - 1x IN, 1x OUT > 3,5Jacks/TRS
- µSD-Card - 2 Save Patches
- µController-Socket - 2 Plug the [dipcore\\_f4](#) in, ask [antichambre](#) to get one!
- J19>[AoutNG](#) - to connect VCF or VCAs...
- J8/9>[DOUT](#) & [DIN](#) - 4 the UI
- J15 (JLCD1) which handle from Stock 4x SPI-Displays (SSD1306), - 4 the UI
- J1>chain a nother STELLAx4 as "SLAVE" to it, to expand polyphony

ready for Pick and Place

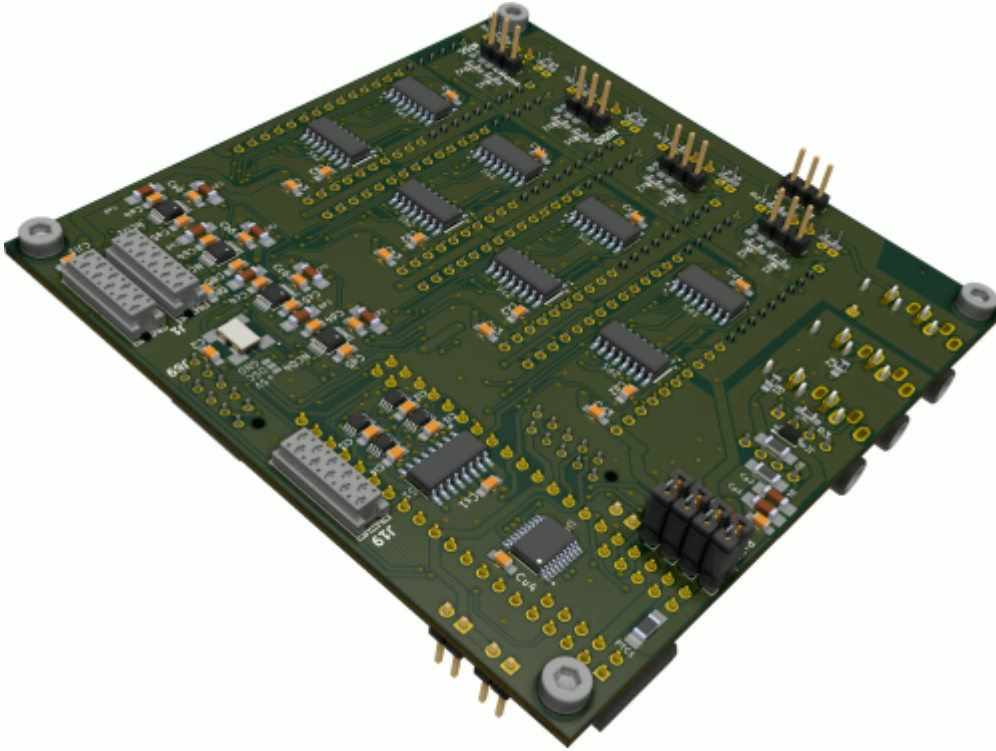

-all SMD-Parts are on one SIDE and are presoldered..

## Features

- \* Summed or Individual Audio-Outs, selectable via normal Jumpers
- \* NTSC or PAL > select via SMD-Solder-Jumper
- \* User-Interface is C-Language-Programmable

## Hardware Requirements

- [dipcoref4](#)
- 4 x [TIA/STELLA](#) [PAL or NTSC...]
- Soldering Iron - with a Dip that can Handle Thruhole-Parts, solder Paste...
- 5V from Mini-USB-Plug, or 5V at a 2Pin-Header connected to example a Eurorack Power Source (+5VDC!)
- dont forget Midi TRS Cables

## Schematic

Rev.A

[stellax4-schematic.pdf](#)



Rev.B  
 stellax4-schematic-b.pdf



# Building


The Design is optimized for Pick and Place > all SMD Parts are on the Top-PCB  
The Rest is Thruhole > easy

Rev.A







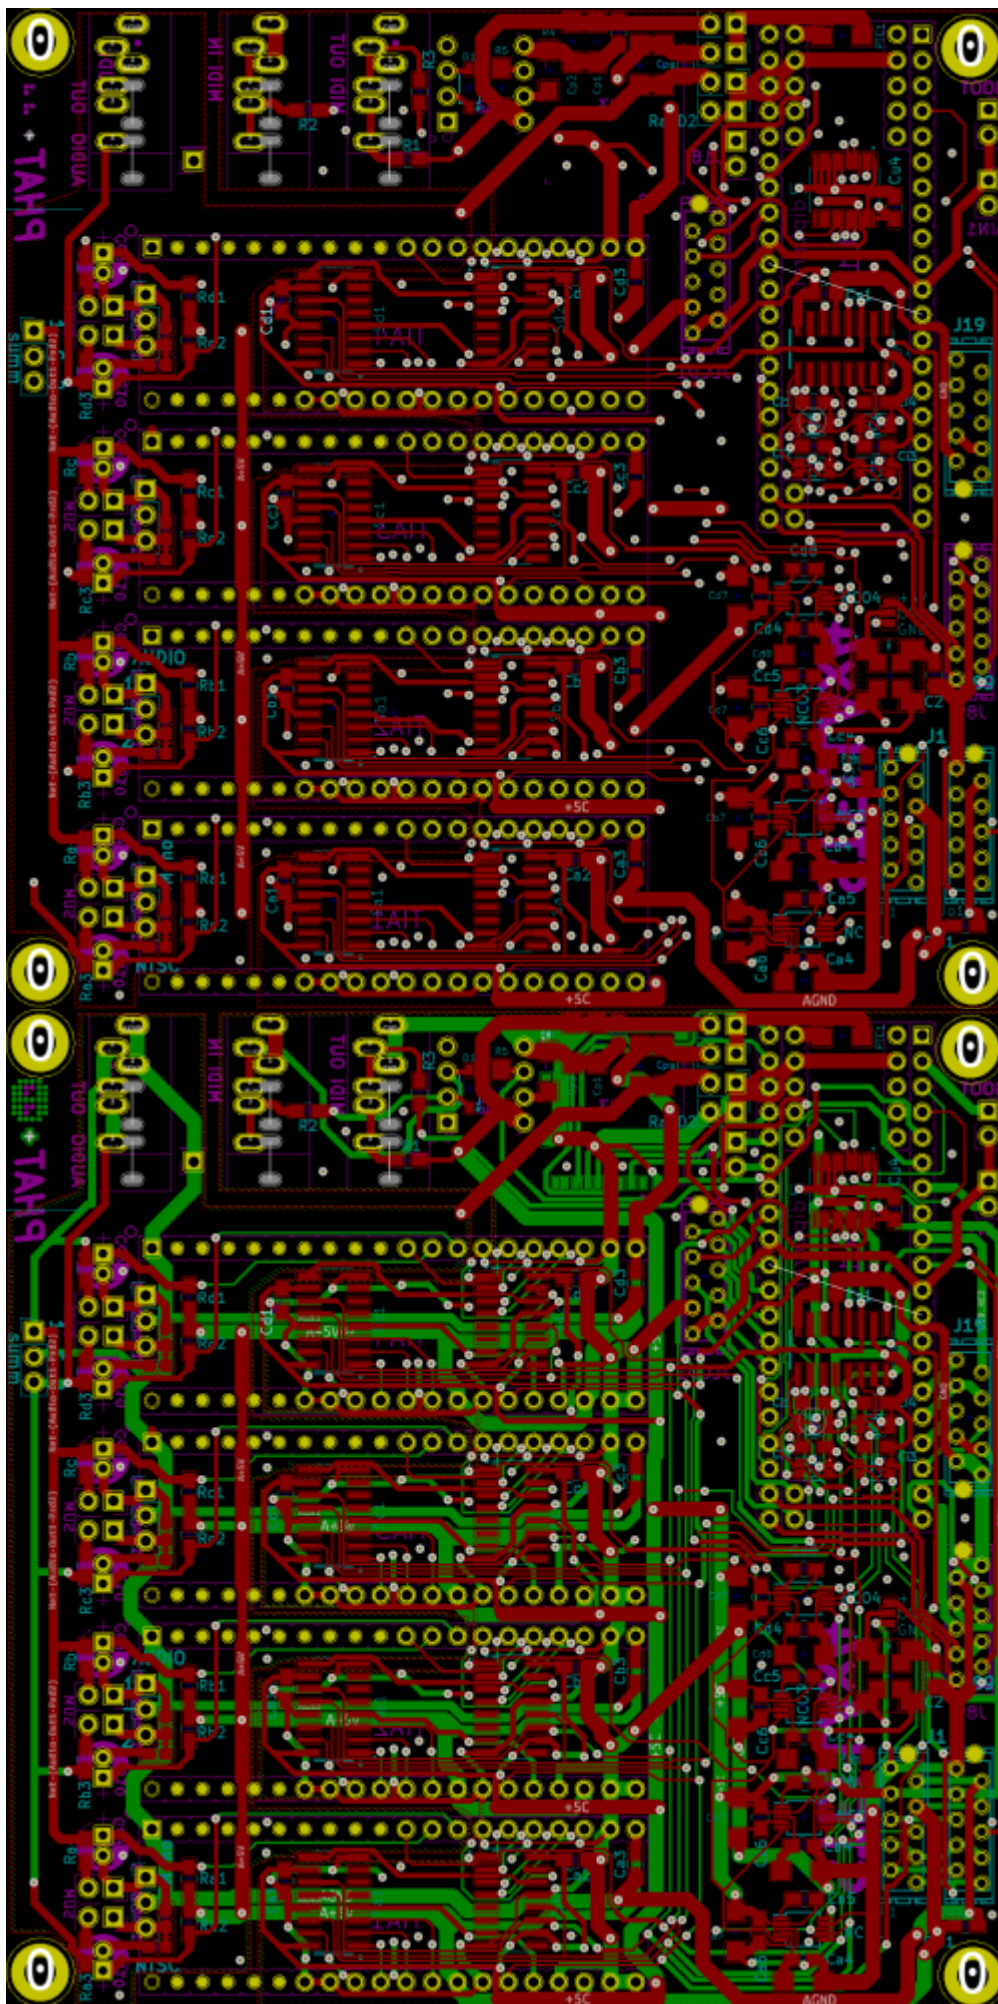

## BOM LCSC

these are the parts which are presoldered by the Pick and Place Machine

Comment	Designator	Footprint	LCSC Part Number	Library Type
	100K	Ra3,Rb3,Rc3,Rd3,Ra4,Rb4,Rc4,Rd4	midibox:0805-R C17407	basic
	100nF	Ca1,Cb1,Cc1,Cs1,Cd1,Ci1,Cj1,Ca2,Cb2,Cc2,C2,Cd2,Ci2,Cj2,Ca3,Cb3,Cc3,Cd3,Ci3,Cpa3,Cp3,Ca4,Cb4,Cc4,Cd4,Cu4,Ci4,Ca5,Cb5,Cc5,Cd5,Ca6,Cb6,Cc6,Cd6	midibox:0805-C C49678	basic
	10uF	Ca8,Cb8,Cc8,Cd8	midibox:1206-C C13585	basic
	1K	R5	midibox:1206-R C4410	basic
	1K8	Ra1,Rb1,Rc1,Rd1,Ra2,Rb2,Rc2,Rd2	midibox:0805-R C17398	basic
	1N4148W	D1	midibox:SOD123-DIODE C81598	basic
	220	R1,R2,R3	midibox:0805-R C17557	basic
	47uF	Cpa1,Cp1,Cpa2,Cp2,Ca7,Cb7,Cc7,Cd7	midibox:1206-C C96123	basic
	4K7	R4	midibox:1206-R C17936	basic
	74HC2G32	IC1,IC2,IC3,IC4	SOIC:VSSOP-8_2.3x2mm_P0.5mm C91874	extendet
	74HC541-TSSOP	U4	midibox:74HC541-TSSOP20 C406865	extendet
	74HC595	Sa1,Sb1,Sc1,Sd1,S1,Sa2,Sb2,Sc2,Sd2	midibox:SOP-16_SOIC-16 C5947	basic
	AD9833BRMZ	NCO1,NCO2,NCO3,NCO4	midibox:MSOP-10_3x3mm_P0.5mm C9652	extendet
	PTC	PTC1	midibox:1206-R C126818	extended

## BOM Mouser

ca. <30€ exlc shipping > so better order other stuff too, over 50€ there is free shipping!

**Parts for Handsolder:** [copy list below, and paste in this link](#)

Comment	Designator	Mouser Part Nr
	647-UKW1H100MDD	8
	490-SJ1-3535NG-GR	3
	512-6N138M	1
	575-1104730841001000	1
	200-CES12001TS	3
	649-68000-220HLF	1
	151-8010-E	12
	649-68000-220HLF	1
	571-1-2178710-0	5
	732-5032CC25.0HJGA3	1
	649-68000-220HLF	1
	575-1104764041001000	4
	798-DM3AT-SF-PEJM5	1

for prototyping i ordered:

**490-SJ1-3535NG-GR** instead of **490-SJ1-3535NG** because it is out of stock - so **GREEN sockets** for now!

Cable-Connectors for UserInterface and AOUT-Module you will need also:


571-1-2178712-0|8

+ Ribbon Cables for example:

710-63911015521CAB|1

Comment	Designator	Mouser Part Nr	
10uF-Audio	Ca9Cb9Cc9Cd9Ca10Cb10Cc10Cd10	647-UFG1H100MDM	8
3.5Jack	Midi-I-1Midi-O-1Audio-Out1	490-SJ1-3535NG	3
6N138	U2	512-6N138M & 575-1104730841001000	1
DIPCOREF4_52P	U1	200-CES12001TS	3
Header-1x2-JUMPER	SumA-SumD2SumB2RailD2RailA2	649-68000-220HLF + 151-8010-E	12
Header-1x3	AUDIO1SUMMED1AUDIO2AUDIO3AUDIO4	649-68000-220HLF	1
Header-2x5-Micromatch	JLCD1,Jo1,ji1,J19,J89	571-1-2178710-0	5
Oscillator-5032u7050	OSC1	732-5032CC25.0HJGA3	1
PinHead-1x2	JBOOT1AIN1J18	649-68000-220HLF	1
TIA	TIA1TIA2TIA3TIA4	575-1104764041001000	4
uSD_DM3ATDM3AT	U3	798-DM3AT-SF-PEJM5	1

## PART Locations

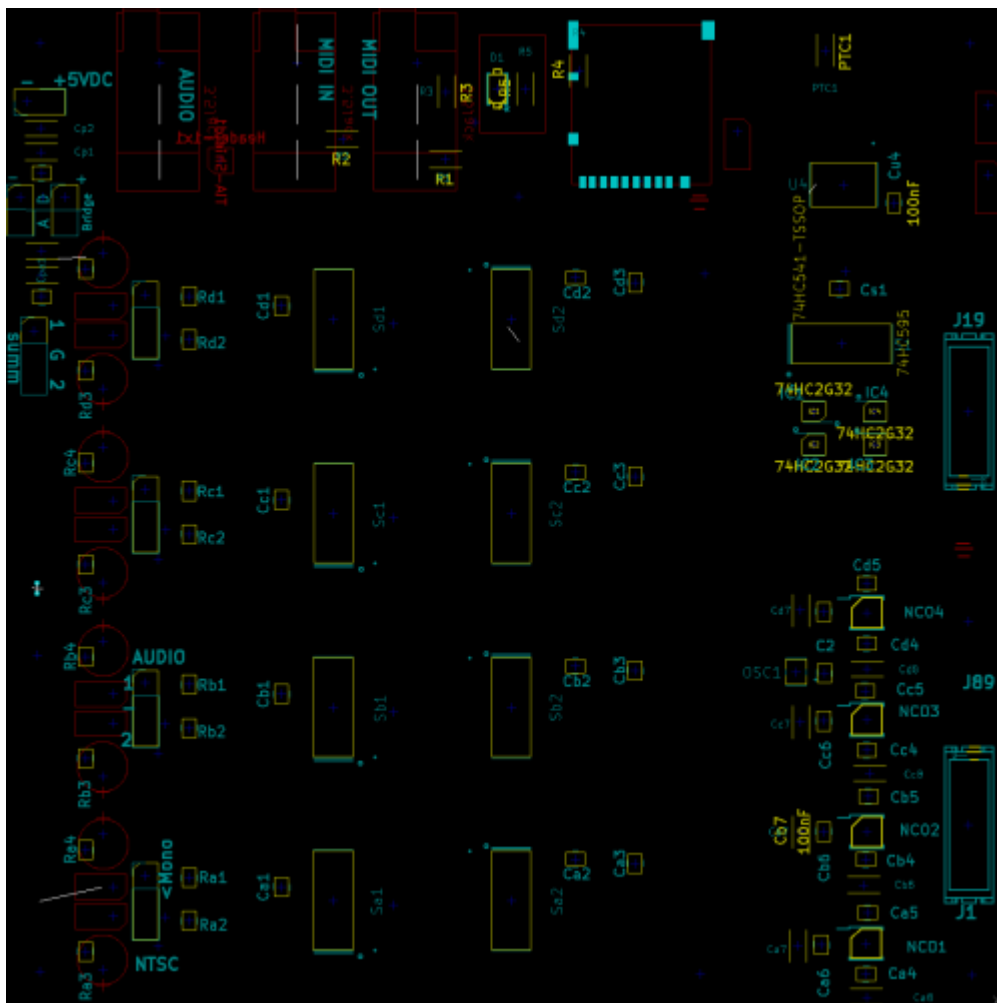

# To Do

waiting for christmas  
UI-PCBs  
Debugging First Version

## Community users working on it

- **Phatline** = PCB & Schematic, UI-Programming, Documentation...
- **antichambre** = Schematic, Porting 8>32Bit, Programming...

Just let a Private message on the forum to user already involved.

## Community users interested on it

- **sajtron** = Chip composer who maybe wanna buy one...

From:

<https://www.midibox.org/dokuwiki/> - **MIDIbox**

Permanent link:

<https://www.midibox.org/dokuwiki/doku.php?id=stellax4&rev=1617742868>

Last update: **2021/04/06 21:01**

