


# STELLAx4

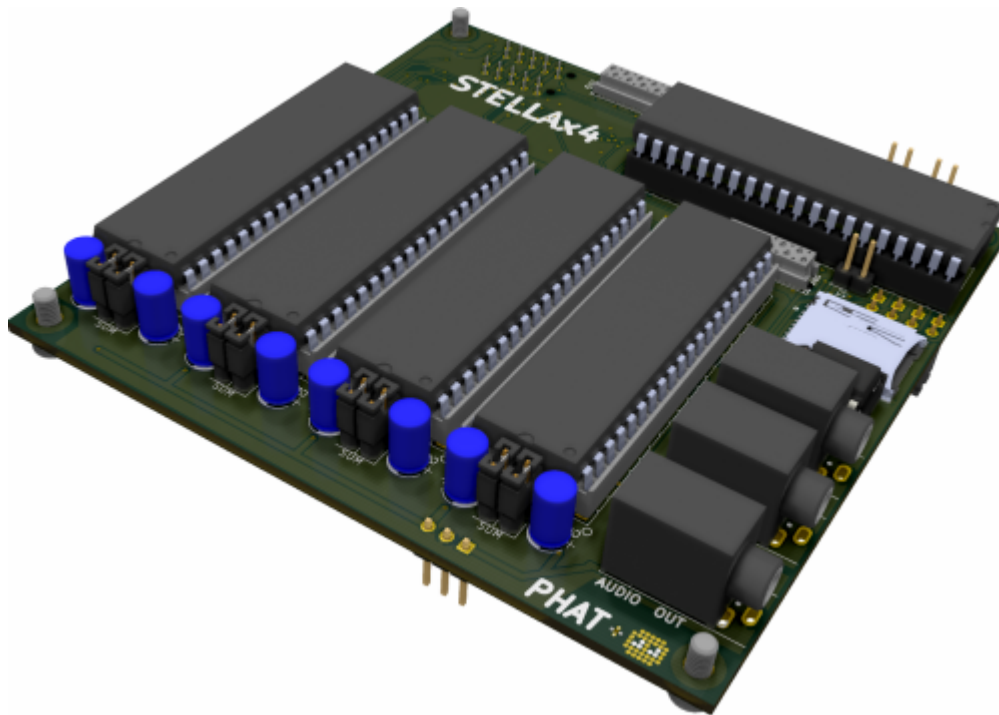

## 4x 8Bit Soundchips/TIA's on a 10x10cm PCB,

controlled from a STM32F4 Microcontroller [dipcoref4](#), based on [Antichambre's TIA Module](#), with [AD9833's](#) as External programmable Clock, the Frequency-range is expanded...

**The Board acts a Motherboard**, for

- 4x Soundchip... AND:

also like the [stm32f4\\_module](#) it provides:

- Midi-IO - 1x IN, 1x OUT > 3,5Jacks/TRS
- $\mu$ SD-Card - 2 Save Patches
- $\mu$ Controller-Socket - 2 Plug the [dipcore\\_f4](#) in, ask [antichambre](#) to get one!
- J19>[AoutNG](#) - to connect VCF or VCAs...
- J8/9>[DOUT](#) & [DIN](#) - 4 the UI
- J15 (JLCD1) which handle from Stock 4x SPI-Displays (SSD1306), - 4 the UI
- J1>chain a nother STELLAx4 as "SLAVE" to it, to expand polyphony

ready for Pick and Place



-all SMD-Parts are on one SIDE and are presoldered..

## Features

- \* Summed or Individual Audio-Outs, selectable via normal Jumpers
- \* NTSC or PAL > select via SMD-Solder-Jumper
- \* User-Interface is C-Language-Programmable

## Hardware Requirements

- [dipcoref4](#)
- 4 x [TIA/STELLA](#) [PAL or NTSC...]
- Soldering Iron - with a Dip that can Handle Thruhole-Parts, solder Paste...
- 5V from Mini-USB-Plug, or 5V at a 2Pin-Header connected to example a Eurorack Power Source (+5VDC!)
- dont forget Midi TRS Cables

## Schematic

Rev.A

[stellax4-schematic.pdf](#)



Rev.B  
 stellax4-schematic-b.pdf







Rev.B





## BOM LCSC

these are the parts which are presoldered by the Pick and Place Machine

Comment	Designator	Footprint	LCSC Part Number	Library Type
---------	------------	-----------	------------------	--------------

100K|Ra3,Rb3,Rc3,Rd3,Ra4,Rb4,Rc4,Rd4|midibox:0805-R|C17407|basic|  
 100nF|Ca1,Cb1,Cc1,Cs1,Cd1,Ci1,Cj1,Ca2,Cb2,Cc2,C2,Cd2,Ci2,Cj2,Ca3,Cb3,Cc3,Cd3,Ci3,Cpa3,Cp3,Ca  
 4,Cb4,Cc4,Cd4,Cu4,Ci4,Ca5,Cb5,Cc5,Cd5,Ca6,Cb6,Cc6,Cd6|midibox:0805-C|C49678|basic|  
 10uF|Ca8,Cb8,Cc8,Cd8|midibox:1206-C|C13585|basic| 1K|R5|midibox:1206-R|C4410|basic|  
 1K8|Ra1,Rb1,Rc1,Rd1,Ra2,Rb2,Rc2,Rd2|midibox:0805-R|C17398|basic|  
 1N4148W|D1|midibox:SOD123-DIODE|C81598|basic| 220|R1,R2,R3|midibox:0805-R|C17557|basic|  
 47uF|Cpa1,Cp1,Cpa2,Cp2,Ca7,Cb7,Cc7,Cd7|midibox:1206-C|C96123|basic| 4K7|R4|midibox:1206-  
 R|C17936|basic| 74HC2G32|IC1,IC2,IC3,IC4|SOIC:VSSOP-8\_2.3x2mm\_P0.5mm|C91874|extendet|  
 74HC541-TSSOP|U4|midibox:74HC541-TSSOP20|C406865|extendet|  
 74HC595|Sa1,Sb1,Sc1,Sd1,S1,Sa2,Sb2,Sc2,Sd2|midibox:SOP-16\_SOIC-16|C5947|basic|  
 AD9833BRMZ|NCO1,NCO2,NCO3,NCO4|midibox:MSOP-10\_3x3mm\_P0.5mm|C9652|extendet|  
 PTC|PTC1|midibox:1206-R|C126818|extended|

## BOM Mouser

ca. <30€ exlc shipping > so better order other stuff too, over 50€ there is free shipping!

**Parts for Handsolder:** [copy list below, and paste in this link](#)

Comment	Designator	Mouser Part Nr
---------	------------	----------------

647-UKW1H100MDD|8  
 490-SJ1-3535NG-GR|3  
 512-6N138M|1  
 575-1104730841001000|1  
 200-CES12001TS|3  
 649-68000-220HLF|1  
 151-8010-E|12  
 649-68000-220HLF|1  
 571-1-2178710-0|5  
 732-5032CC25.0HJGA3|1  
 649-68000-220HLF|1  
 575-1104764041001000|4  
 798-DM3AT-SF-PEJM5|1

for prototyping i ordered:

**490-SJ1-3535NG-GR** instead of **490-SJ1-3535NG** because it is out of stock - so **GREEN sockets** for now!

Cable-Connectors for UserInterface and AOUT-Module you will need also:


571-1-2178712-0|8

+ Ribbon Cables for example:

710-63911015521CAB|1

Comment	Designator	Mouser Part Nr	
10uF-Audio	Ca9Cb9Cc9Cd9Ca10Cb10Cc10Cd10	647-UFG1H100MDM	8
3.5Jack	Midi-I-1Midi-O-1Audio-Out1	490-SJ1-3535NG	3
6N138	U2	512-6N138M & 575-1104730841001000	1
DIPCOREF4_52P	U1	200-CES12001TS	3
Header-1x2-JUMPER	SumA-SumD2SumB2RailD2RailA2	649-68000-220HLF + 151-8010-E	12
Header-1x3	AUDIO1SUMMED1AUDIO2AUDIO3AUDIO4	649-68000-220HLF	1
Header-2x5-Micromatch	JLCD1,Jo1,ji1,J19,J89	571-1-2178710-0	5
Oscillator-5032u7050	OSC1	732-5032CC25.0HJGA3	1
PinHead-1x2	JBOOT1AIN1J18	649-68000-220HLF	1
TIA	TIA1TIA2TIA3TIA4	575-1104764041001000	4
uSD_DM3ATDM3AT	U3	798-DM3AT-SF-PEJM5	1

## PART Locations

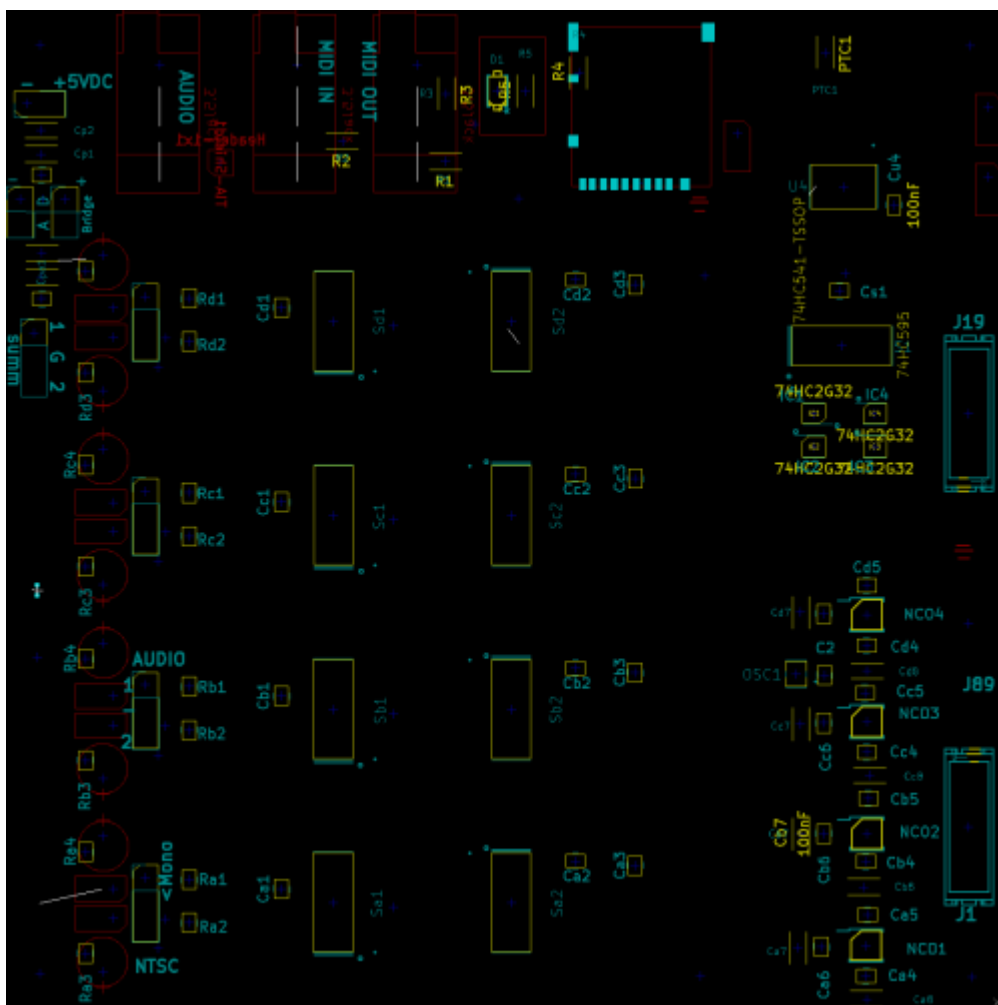

# To Do

waiting for christmas  
UI-PCBs  
Debugging First Version

## Community users working on it

- **Phatline** = PCB & Schematic, UI-Programming, Documentation...
- **antichambre** = Schematic, Porting 8>32Bit, Programming...

Just let a Private message on the forum to user already involved.

## Community users interested on it

- **sajtron** = Chip composer who maybe wanna buy one...

From:

<https://www.midibox.org/dokuwiki/> - **MIDIbox**

Permanent link:

<https://www.midibox.org/dokuwiki/doku.php?id=stellax4&rev=1617742868>

Last update: **2021/04/06 21:01**

