
EASY CV

Test Equipment: CV-Destination MB33 MAM:

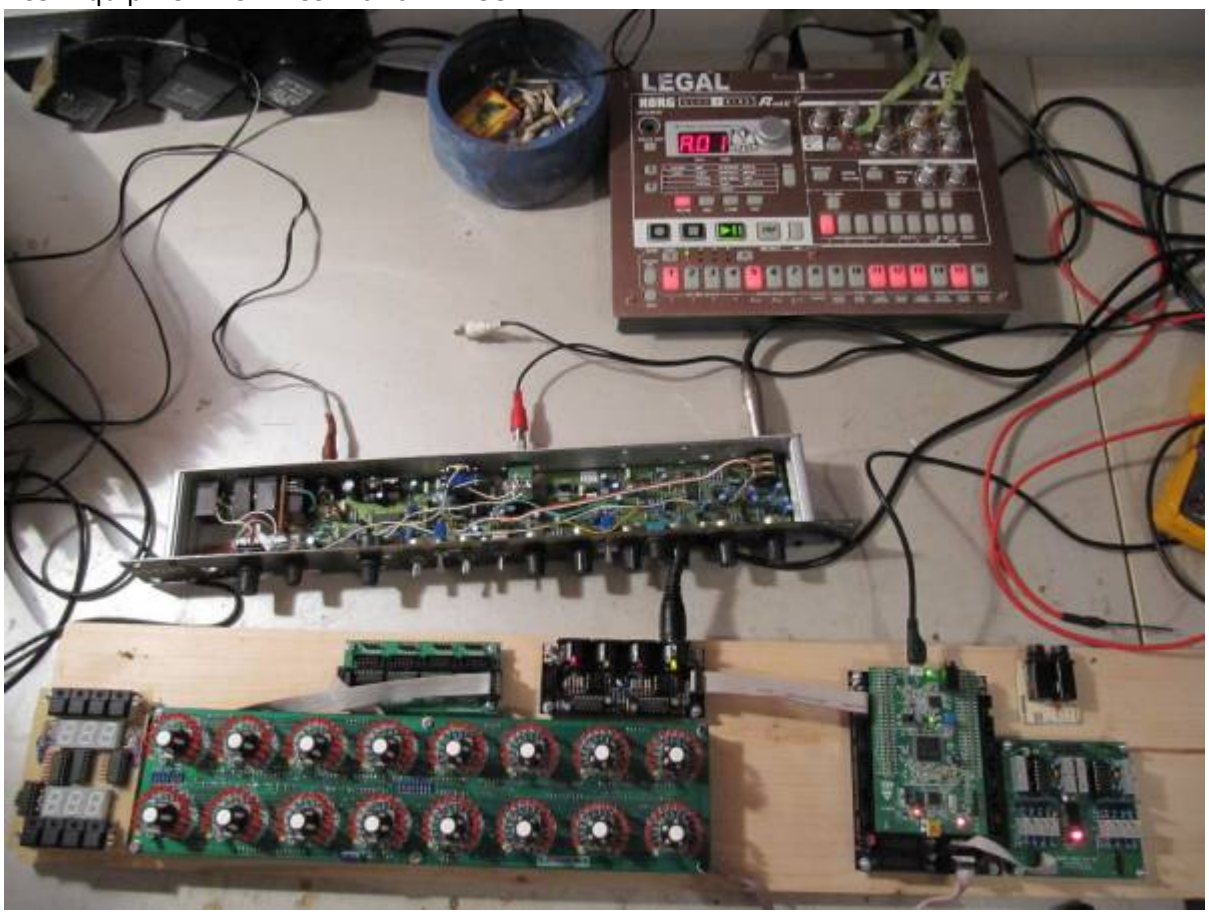

Introduction

All Parameters are saved as a preset as a song (programchange…)
Digital created LFO+ENV with CV-Output.
No Displays, No Menues, Minimal buttons, much Scopes, much Led-Ring-Rotarys (LRE-8x2CS)
one big UI with complete functions for one LFO+ENV Voice + 4xChannelstrip Controlls…

LFO+ENV are mixed together softwareside, to use only one CV-Output
Each Channel = Filter need 8xCV-Outputs
Copy Paste for LFOs and ENVelopes between the Voices
Copy Paste for a Song aka Preset aka Bank aka Program(change)
Jam Style Pattern load (next Preset Display) + Preset Morph between Current-Preset and Next-Preset


The Early Design was a EuroRack-Module: A Breakoutmodule for each CV-Output, with Depth-rotary, Focusswitch (Pushrotary), 2x Scopes (LFO+ENV) and LFO/ENV-Switch to show on one Display the Mixed Waveform & to switch the Rotary to “ENV” or “LFO” Mode (there is only space for one Encoder - maybe just make PAN Style, instead of 2 individual level -maybe more live feel?, how ever when using an 3Stage switch, i could disable MIX-View, or display it on ENV or LFO…maybe a good choise ;)) The Depth-rotary has no Ledring, want to display it as a bar or as Value in the scope…

FrontPanel

Brain

THE **LEFT** SIDE of the BRAIN > Preset-Management: **Save** & **Load** the PROGRAM, can be done by Midi-ProgramChange -or With the LOAD-**PRESET**-Encoder
then press **LOAD** -or **Morph** to the next Program slowly with the MORPH-Encoder
-Another option is to take a **PUSH-ENCODER** for **LOAD** & **STORE** > and load and store it by pushing it... would free 2 buttons for other functions.
MORPH?:
-The Upper 7 Segment LED- Display: is the **LOAD Display** indicate the new Program with ENV+LFO -
The downer7 Segment LED- Dsipaly: is the **STORE Display** it indicates also the current Program with ENV+LFO
–with morph you crossfade between both Presets (be carefull, first Store the current Preset
Paste & **Copy** do their job @ the whole PROGRAM Memory
ENV-PASTE & **ENV-COPY** do their job @ the selected Envelope > (ENV-Voice selection is done by the breakout Modules) ... LFO..same

Midi-Channel Note NR or Number of Envelope is a real programmer job (C), with usb-upload from computer .... this is a individual device, and once set, it has to play > and it just should do LFOs and Envelopes Fixed routed, no generic, special > in my case for a filterbank.

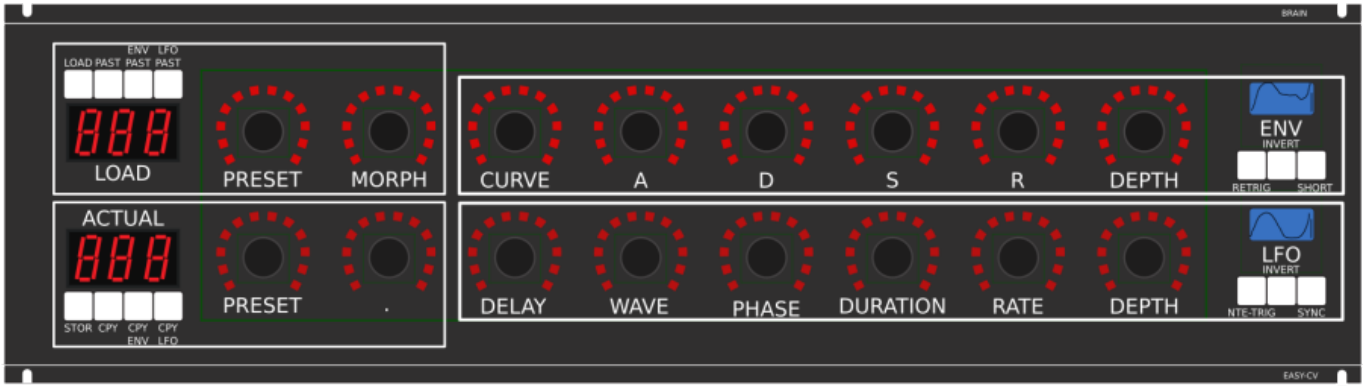

THE **RIGHT** SIDE of the BRAIN > LFO + ENV Settings (one Voice): ADSR with:
CURVE Paremter which give exponentially to it (no straight lines While Fall and Rise)
Short: just shorten the Maximal lenght of a Envelope, haveing more Feeling on Encoders should change Scope Display also...
LFO: get synced with Midi, and there is a retrigger by Notes...
Phase: offsets the start-Phase
Delay: simple delay (nte-Trig)
Rate: clear from 8 wholes to 128th or so
Wave: access to the Waveforms
Duration: interpret Midisync in trippled, whole notes or whatever...

DEPTH: is the maximal Value of FALL and RISE and SUSTAIN, i know i loose resolution with this...but i have to have a memory filterbank,...doing depth instead with Potentiometers on Filtermodules... would give no memory...

BreakOut

this will not be supportet > since i dont want a Euro-Module Setup > i want one big filterbox. 1. Discharged UserInterface for the Brain in “Island mode” (Scopes + Digital-CV-Amount)
2. CV-Breakout EuroModule to be located near the CV-Destination (example: a Filter).
2 Waveforms (ENV+LFO) are mixed together softwareside
that bring 2 advanteges:
1.save one CV-Output
2. the Amplitude of each Waveform is saved in the patch, so the CV-Amount to a Filter is saved in the Patch
That bring 2 disadvanteges:
1.LFO or ENV cant get patched to individual destination
2.the Resulution gets lower 2 very low, and the code has to be adptet much... or have to be made from scratch Because I use the device for a Memory-Filterbox (VCF+VCA), i am ok with the pros and cons, so i call it EASY-CV



Envelope Scope: show the ENV-Waveform
or the Mixed-CV-Output-Waveform (when Switch is in LFO Mode)
and show the Envelope-Amount with a BAR or as numeric Value?
MIXED CV Plug: CV-Output > Mixed Waveform ENV+LFO
Switch @ ENV:

1. Depth-Encoder change ENV Amount of the CV-MIX
2. ENV Scope will show ENV Wave
3. LFO Scope will Show CV-Mix

Switch @ LFO: visa versa ENV
Press the Encoders built in **ENCODER-BUTTON**:
will switch the BRAIN-A-D-S-R and L-F-O ENCODER to the Page for THIS Module...
workflow, see what you have with a Scope, over a filter, and edit exact this selected CV on the brain

in full detail...

VCA-VCF


CVś(AOUT):
1.VCF-CUT
2.VCF-RES
3.FILTER DRIVE

4.VCA-ENV
5.VCA-DRIVE

6.DRY-WET (Orginal vs Filtered Mixer)
7.Send 2 EFX1
8.Send 2 EFX2
So 1x 8AOUT-Module for each “Channelstrip”, makes a total of 4x8AOUT-Modules.
The Module of Choise is a 16Bit, since i control with the the same AOUT-Channel ENV+CUT-OFF... so there is no analog potentiometer for Cutoff or resonance... it is all saved in the Preset.

the VCA is basicly a simple VCA (MS20Like) or something
the VCF are a 303 18dB for the 24db Filter it will be a SSM2044, where bords are available.

Original Schematics 303 - VCA-VCF

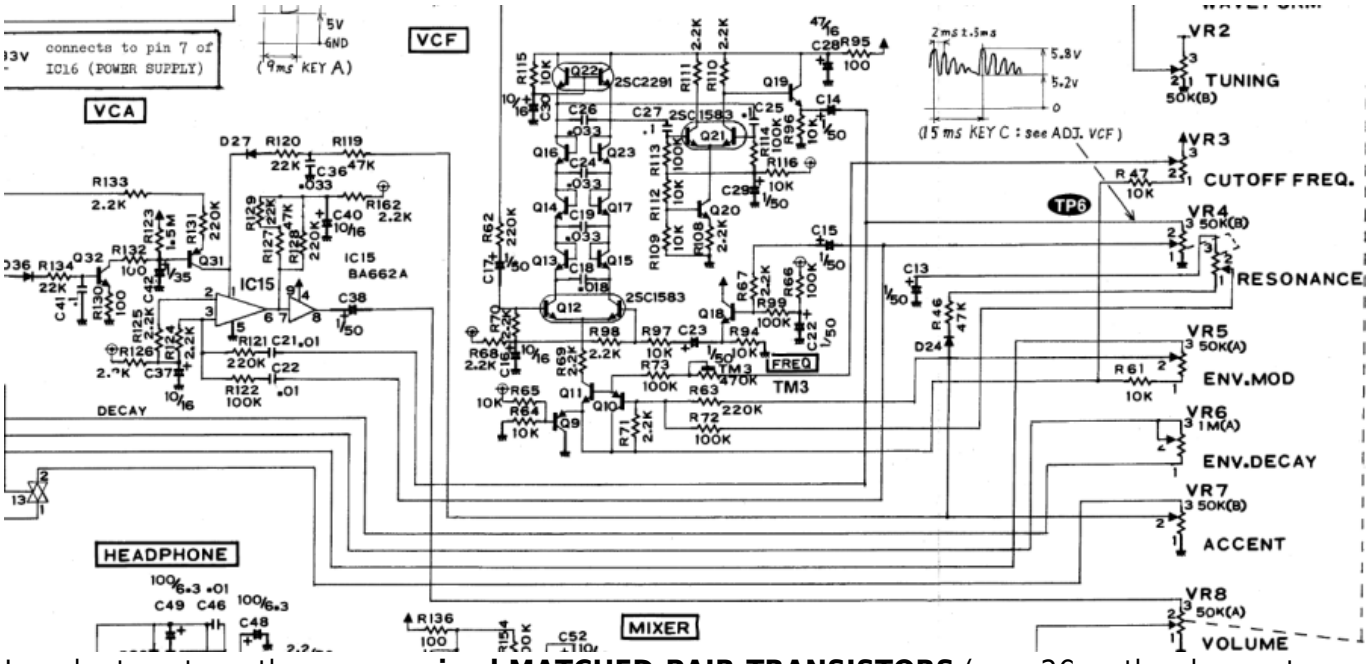


In order to not use those **overprized MATCHED-PAIR-TRANSISTORS** (over 2€ on the cheapest place) i have to use standart Transistors and make a **VBE-MATCH** on my own, i have already a PCB from here - to measure the transistors with a Multimeter: https://midisizer.com/other/vbe-matching/

Example for a Filterbank


Here are 8Envelopeś 4xfor VCF 4xfor VCA... in fact there could be used more then this for example


8xVCF and 8xVCA...since the BREAK-OUT-Modules are Modular, and they share the same “Main-UI”...the only limiting factor is the CODE...i am not a C-Guru, and maybe i will still have timing problems with 8x CV-Outs...we will see.

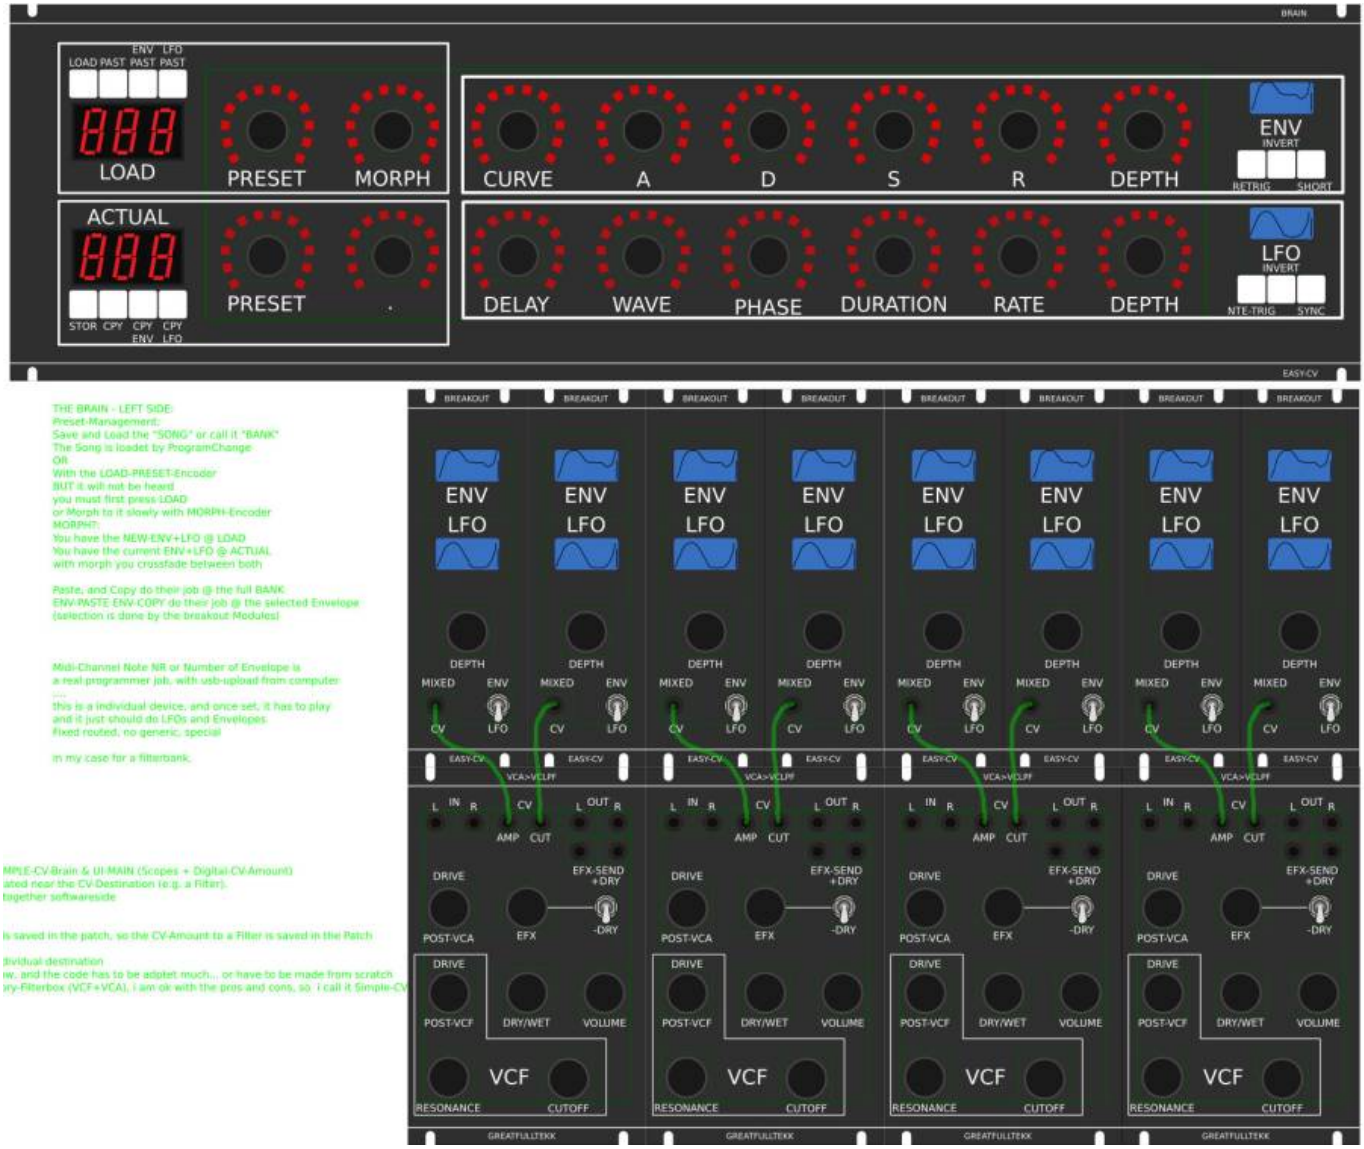

I will use it to filter:
2xGuitar-Loopstations
1xGuitar
1xPercussion-Master

A not EUROMODULE-BASED Version of something like this is the FILTERBOX: (this is the Design i preefer @ the moment)

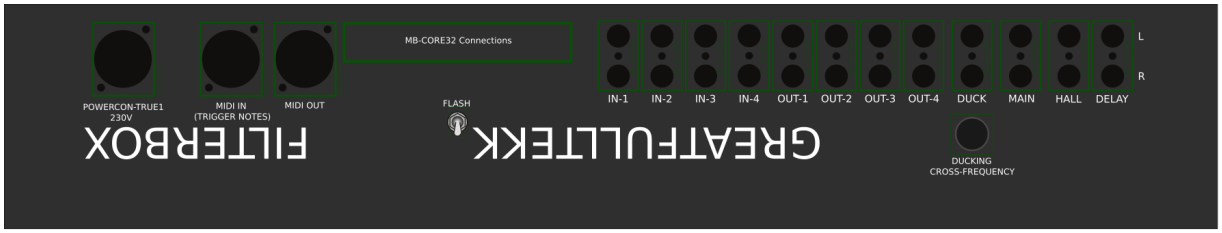

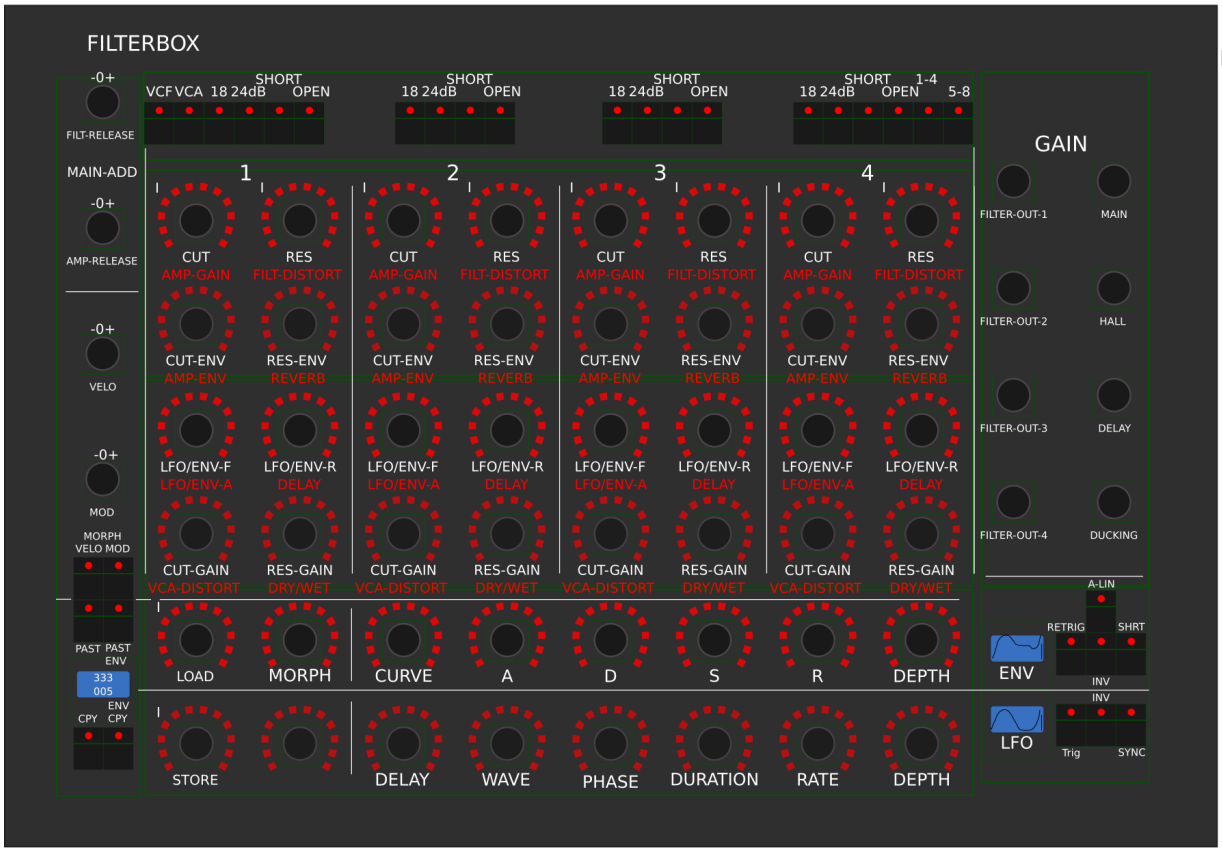

General Design

The Panel is made of transparent but shadet (black transparent) Plexiglass.
The Panel is directly mounted into a Flightcase.
The 3x LRE8x2 (LEDRING) are mounted with the Encoder Nuts, the rest of the PCBs are mounted with normal thruhole screws.


FrontPanel

PCBs

The Analog-IO Board on the Backpanel, holds:
-the ENV-VCAs
-the DryWet-VCAs, Filter-Releay-Switch
-SEND-EFX-VCAs
-the Summing Mixer
-the Ducking-Cross-AMP-Follower+Ducking-VCAs
-VCF+ENV-VCA-Distortion-Driver-VCAs

-the Connectors to connect the Filter, AOUT, Poti-Boards

Left-Part of the Brain on Breathboard:
OLED-Display
Button: ShadowSE/ITT
ENCODER: with built in Pushswitch
a early state with 7Segment Displays to indicate the Patches

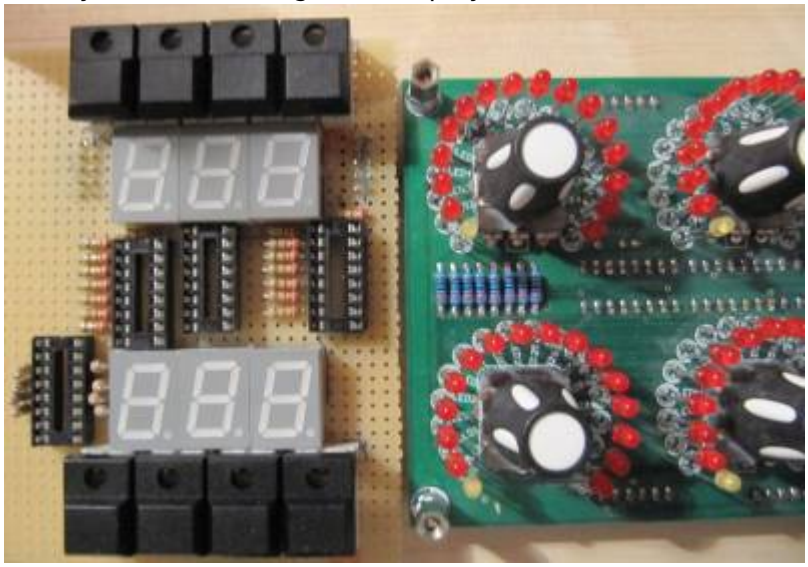

1. UI Parts Listing

BRAIN + BREAKOUT

- 6,3 Neutrik Connector
- FLASH-Switch @ Rs-components

Value	Type	Qty
Switch	SPDT Vertical PCB-Mount ON-OFF-ON	1

Fix Me! Fill Table

Pots / Knobs

- Alps RK11K Series
- Alpha Pots @ Thonk
- Knobs Suppliers
- Fix Me! which Values for the Audio-Mixer?

3.Footprint Making in KiCAD

- ALPS Pots
- Alpha Pots

- 6,3mm Jack
- Switch
- Momentary Switch
- SSD-Displays
- OLED DIsplay
- Rotary Encoder

Fix Me! have to be done

4. Schematics in KiCAD

Fix Me! have to be done

5.PCB Making In Kicad

PCB Making Order

- BRAIN PCBs:
a.Left-Brain
b.Right-Brain
- 3x LRE8x2CS - is a generic PCB which i already have (fairlightiiś)
- Backpanel PCB
- FILTER PCBs

From:
https://www.midibox.org/dokuwiki/ - **MIDIbox**

Permanent link:
https://www.midibox.org/dokuwiki/doku.php?id=easy_cv&rev=1471134952

Last update: **2016/08/14 00:35**