
MSQ-CC-LRE

MotionSeQuencer for ControlChanges for 2xLRE8x2 Boards
Synth-Patch-Editor & Motion-Sequencer 4 ControlChange (= CC-Automation)



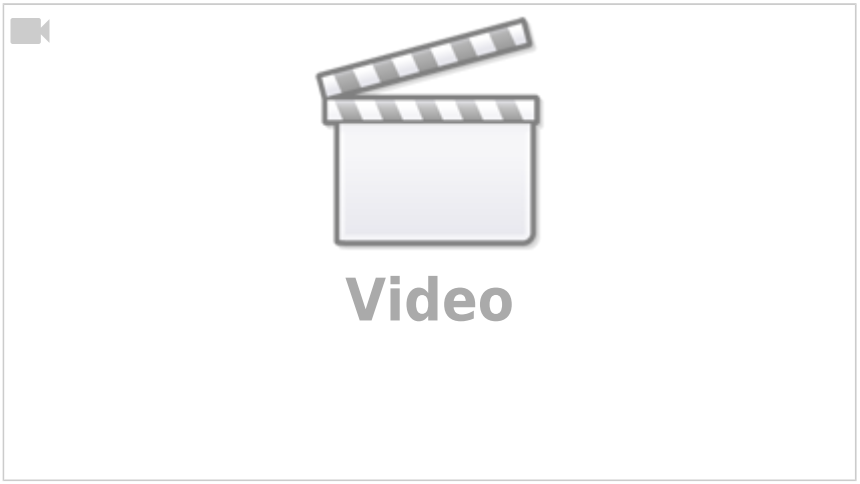

Introduction

Controls and automate a Nord Drum2 (Drum-Synth)NORD DRUM 2

It acts as:
- **Midi Merger** NTE,CLK,PC merge with CC... - **Patch Manager** it replaces the Synths internal Patch Storage, each PC Number from your Sequencer is added by the BANK CC (CC 32), where each Nr is ADD 128 PC Numbers more...
- **Motion Sequencer** Record your Controller Movements in a Sequence in 32th Resultion @ maximal 256 Steps length

Features

- **Remote your Synths** by: 8x Midichannels with up to 32x Control Change (CC)
- **Save the Patches** and dump it to Synth
- **Load hundrets of Patches** via received Program Change + the Bank-CC (CC32)
- **Save Patches** vie CC24 + CC value 0-127… when sending before a BankCC32 you can expand that to 128×128 patches
- **Record CC-Motion-Sequences** - **PLAY Motions-Sequences** up to 256 steps @ 32th rate - **VELOCITY MORPH** Add Velocity-Ammount to CCs
- **MERGE** incoming Midi-Notes/Clock/Pitchbend with Automated CCs
- **Set Sequencer Beatstructure** - how to interprete Clock-ticks (4/4, 5/4, 6/4, 7/4…) - CC23
- **Global Page**: for example you use 8 simular Drum-Voices, with the Global you have 8 channel strips with dedicated Controlls, for example:
8xVolume, 8xTone/Noise-Mix, 8xDistortion, 8xClick
if you have one Synth over 2xMSQ_CC_LRE Tracks(booth set to MidiChannel 0, to get 64CCs instead of 32), then the Global Page: have the abillity to show/edit a parameter from Track1Voice on Track1Global, and from Track2Voice on Track2Global… it depends how you set the Midichannel in the Systemsettings (which are hardcodet but via Mapping Array changeable)
- for one multipart-synth, MSQ_CC_LRE do all the Preset Store, and Automations, so it is one Unit > to use the Unit in a other way would make all the Patches (128×128 patches) useless, so once done, its bound to it, load all with Programchange! minimal is better here, there will be other **MSQs** outthere see MSQ-CC-BCR

Hardware Requirements

External Requirement:(for example)

- Melody/Clock Source with ProgramChange-Output: midibox_seq_v4l oops that dont do PC…
- Melody/Clock Destination: NordDrum 2

Midibox:

- core32
- 1xMidi IO connect 1 midicontroller and 1 Note/Clock-Source/Destination
- SD-Card, formated with FAT32, and the file “bcr1.syx” on it
- Soldering Iron, Wires, PCB.…
- USB Power Supply… I tried to use the Midi-BUS-Power from BCR2000 but it is too weak!
- 2x LRE 8×2 mb-lre8x2cs_pcb
- 3 extra Encoders and Ledrings (to controll the unit) + Pushfunction inclusive Button LED
- 8 Momentary Buttons without LED
- 1 Momentary Button with LED
- 1x DINX4
- 1x DOUTX4

Setting

Cabeling

MidiIO PortB Out »> Synth Midi IN
MidiIO PortB In »> Clock+Notes

Frontpanels

Stickers

LCD

it would be possible to add 16 OLEDs but... but i dont have the money for that right now....

MBHP

Software

Firmware

V1. from 9.05.2018msq_cc_lre_v0.norddrum2.zip
hardcodet for a NordDrum2 - but change-able in Mapping via

CC Routing to Synths

MSQ_CC_LRE internal i have 8×32 CCs, they are always identical.
but with a simple input output matrix i can decide which CC it gets in real world.
each of the 8 Part can have midichannle 0-15...
So we talking about Mapping... in the moment it is made in the source code with a simple array.

To Do

alot, but since it is base on MSQ-CC-BCR! most is done, and its running solid

maybe scale min max values for CC: for example different synths have only 0-3value instead of 0-127, by different functions like WAVEFORM...) - this will be interesting when using other synths then nord drum...

Resources

Community users working on it

- **Phatline** = Programming, Documentation...

Just let a Private message on the forum to user already involved, the sourcecode is includet in the firmware .zip!!!

From:
https://www.midibox.org/dokuwiki/ - **MIDIbox**

Permanent link:
https://www.midibox.org/dokuwiki/doku.php?id=msq-cc-lre&rev=1526062803

Last update: **2018/05/11 18:20**