

Core 4 Discoveryboard STM32F407VGT6

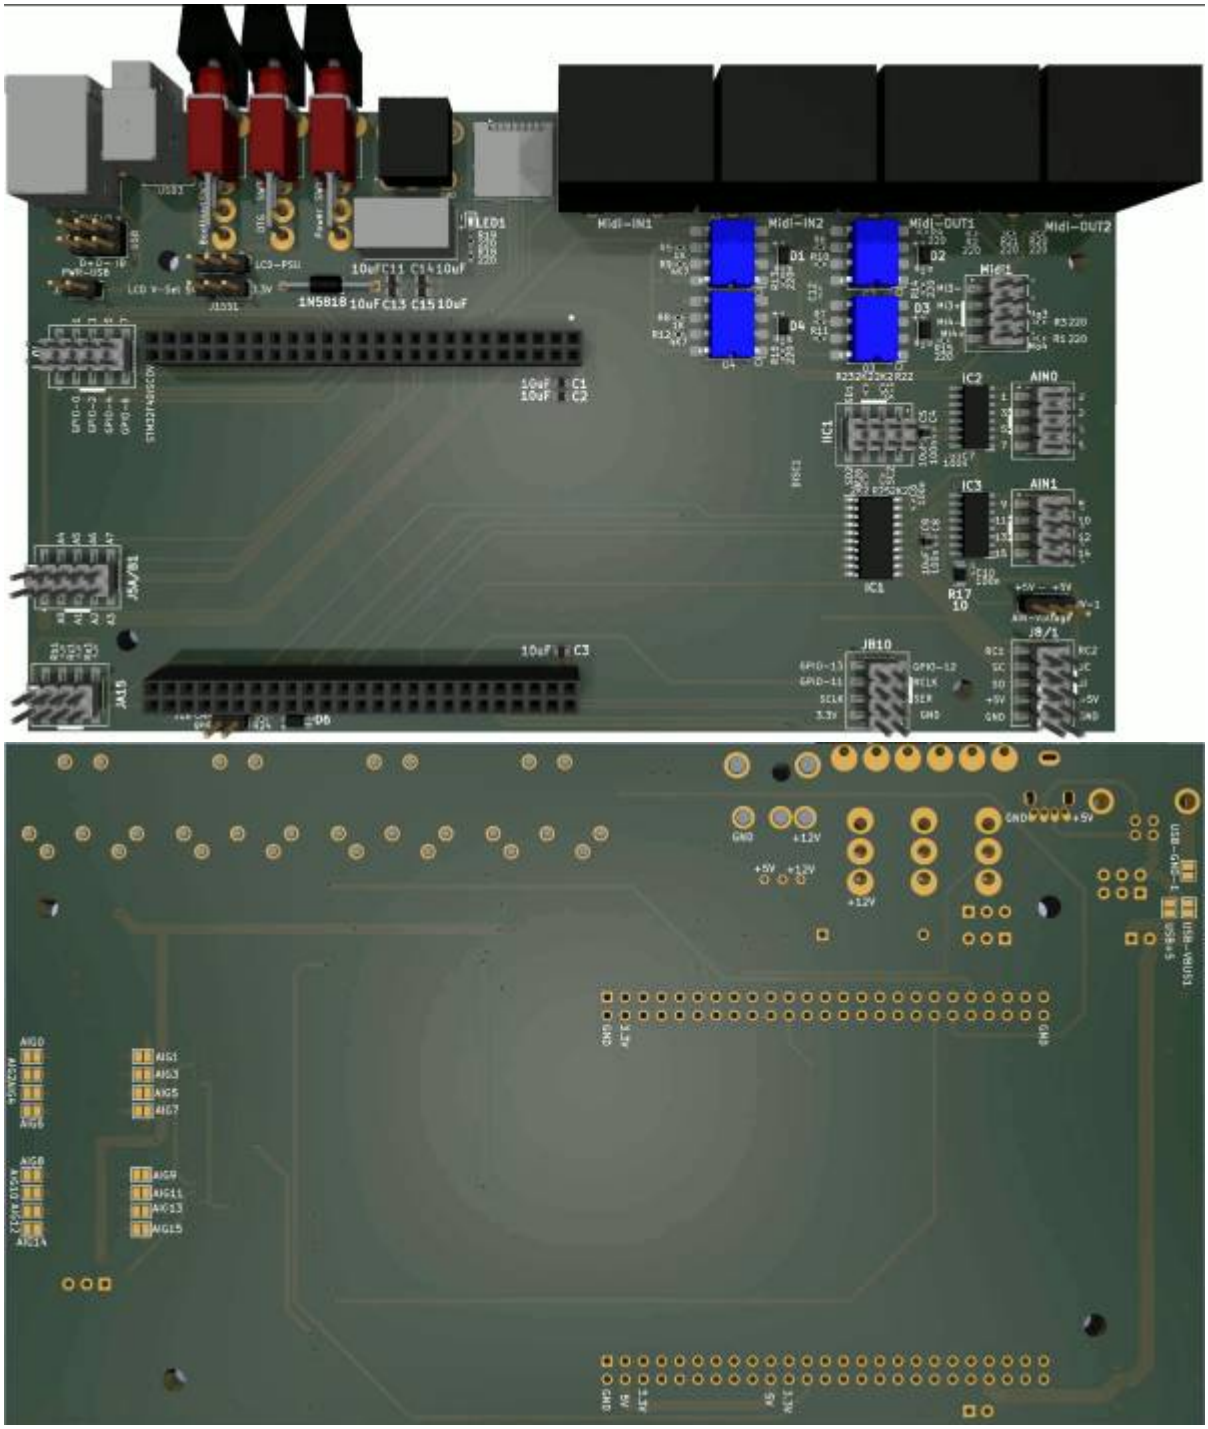

this is one essential part for my triggermatrix5
i need a core pcb which is aviable in Europe, and uses the stm32F407VGT6 chip, which has 1MB ram...

Shematic

core4disc-shematic.pdf

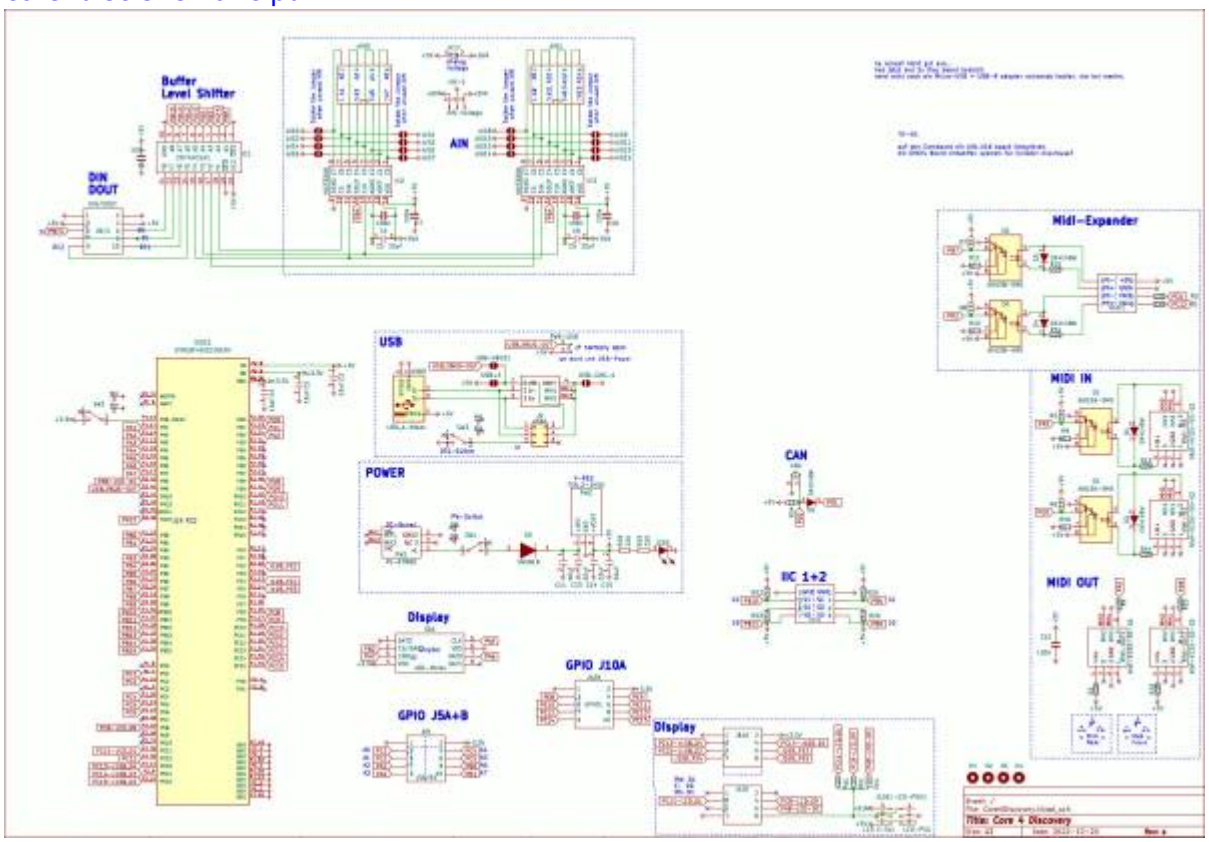

Building and BOM

parts off it is pick and place the other part is handsolder

BOM

the LCSC Parts are done with the Pick and place - so no need to order...

Comment	Designator	LCSC	Lot
SN74HC541	IC1	C116811	1
1K	Ra1,Rb1,Rc1,R5,R6,R7,R8,R24	C11702	8
J10B	GPIO1	C124391	1
AIN	J5A/B1	C124391	1
DIN/DOUT	J8/1	C124391	1
MCP3208	IC2,IC3	C16939	2
10	R17	C17902	1
6N138-SMD	O1,O2,O3,O4	C188666	4
Pin-Header-2×4-SMD-doubleSizeSymbol	AIN0,AIN1	C192300	2

Comment	Designator	LCSC	Lot
J4A+B	IIC1	C192300	1
J15A	JA15	C192300	1
J10B	JB10	C192300	1
-	Midi1	C192300	1
LED	LED1	C2286	1
220	R1,R2,R3,R4,R13,R14,R15,R16,R18,R19,R20,R21	C25091	12
2K2	R22,R23,R25,R26	C25879	4
4K7	R9,R10,R11,R12	C25900	4
100n	C4,C6,C7,C8,C10,C12	C307331	6
10uF	C1,C2,C3,C5,C9,C11,C13,C14,C15	C440198	9
uSD-Molex	SD1	C585350	1
1N4148W	D1,D2,D3,D4,D6	C81598	5

The Mouser parts that have to be soldered by hand - you have to order them on your own...:

Comment	Designator	MouserNumber	Lot
PW2	TSR_2-2450	495-TSR2-2450	1
USB1	USB-B-Socket	538-67068-8000	1
D5	1N5818	583-1N5818-T	1
Midi1	-	649-1012938390801ALF	1
Midi-IN1, Midi-IN2, Midi-OUT1, Midi-OUT2	Midi-KCDX-5S-S2	806-KCDX-5S-S2	4
AIV-1	AIN-Voltage	Pin Header	1
DISC1	STM32F4DISCOVERY	511-STM32F407G-DISC1	1
J1	PWR-USB	Pin Header	1
J2	USB Pin	Header	1
J15S1	LCD V-Sel	Pin Header	1
J18	CAN	Pin Header	1
LCD-PSU1	LCD-PSU	Pin Header	1
PW1	PJ-079BH	490-PJ-079BH	1
SW1	Power	611-1101M2S4AV2BE2	1
SW2	Bootload	611-1101M2S4AV2BE2	1
SW3	OTG	611-1101M2S4AV2BE2	1
USB3	USB_A-Molex	538-89485-8000	1


Order-List

copy following list into this mouser.com-Link

```
495-TSR2-2450|1
538-67068-8000|1
583-1N5818-T|1
649-1012938390801ALF|1
806-KCDX-5S-S2|4
Pin Header|1
511-STM32F407G-DISC1|1
```

490-PJ-079BH|1
611-1101M2S4AV2BE2|1
611-1101M2S4AV2BE2|1
611-1101M2S4AV2BE2|1
538-89485-8000|1

Order from Reichelt:
2x 2x25Pin Female 2,54mm Headers
1x 1x10Pin Female 2,54mm Headers
1x 2x10Pin Female 2,54mm Headers
5x PinHeader 2x5Pin Female
4x PinHeader 2x4Pin Female

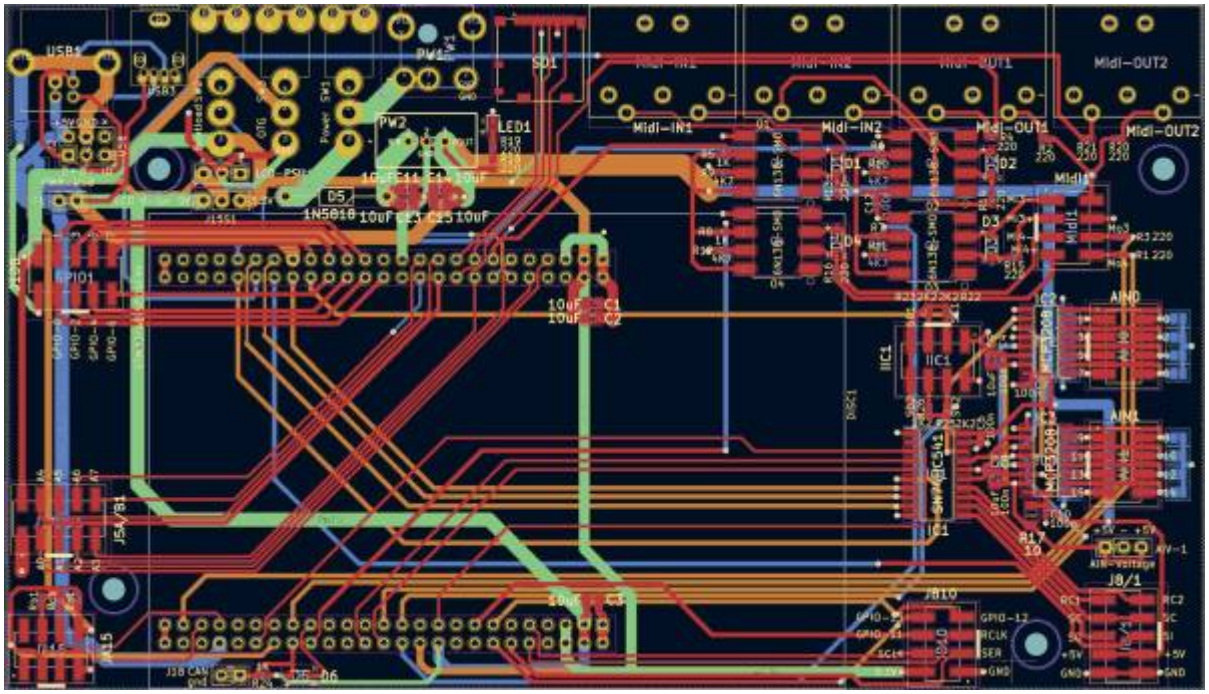

To Do

waiting for the assembled Prototype

Community users working on it

- **Phatline** = PCB & Shematic, UI-Programming, Documentation...

Just let a Private message on the forum to user already involved.
or join the forum: Triggermatrix 5

From:
https://www.midibox.org/dokuwiki/ - **MIDIbox**

Permanent link:
https://www.midibox.org/dokuwiki/doku.php?id=core4disc&rev=1672261865

Last update: **2022/12/28 21:11**