



SD Card Module

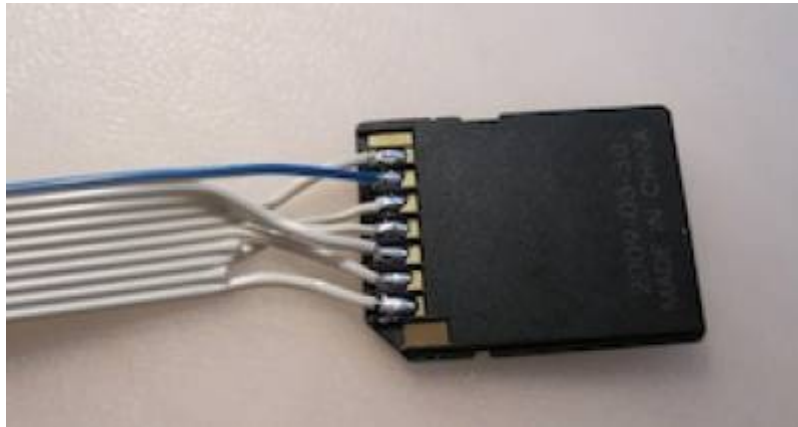

Interconnection

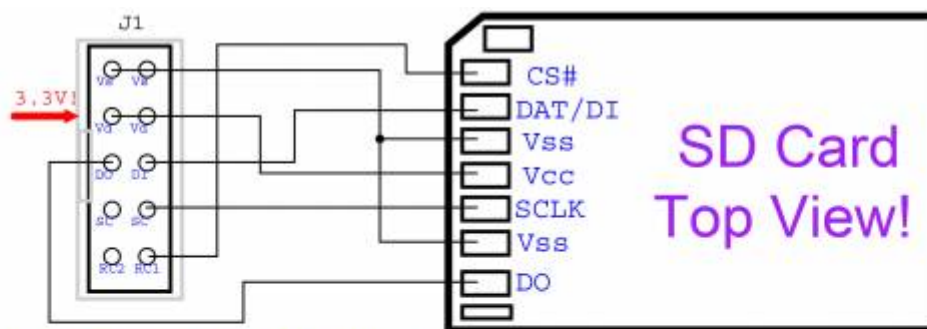

Note: DO connected to SI of Core Module
DI connected to SO of Core Module
S stands for "Serial", not "Slave"

Direct Connections are only possible with MBHP_CORE_STM32 (3.3V IO)
PIC based MBHP_CORE (5.0V IO) requires additional resistors (voltage dividers)
and a 3.3V Voltage Regulator

MIDibox Hardware Platform
MBHP_SDCARD
(C) T. Klose 2009-02-24

STM32 Specific

The resistor array R30 of the MBHP_CORE_STM32 module shouldn't be connected when a SD Card is used, because pads are configured in Push-Pull mode at 3.3V. SD Card transfers could work unstable with these Pull-Up resistors!

From:
<http://www.midibox.org/dokuwiki/> - **MIDibox**

Permanent link:
http://www.midibox.org/dokuwiki/doku.php?id=sd_card_module&rev=1467025207

Last update: **2016/06/27 12:00**

